


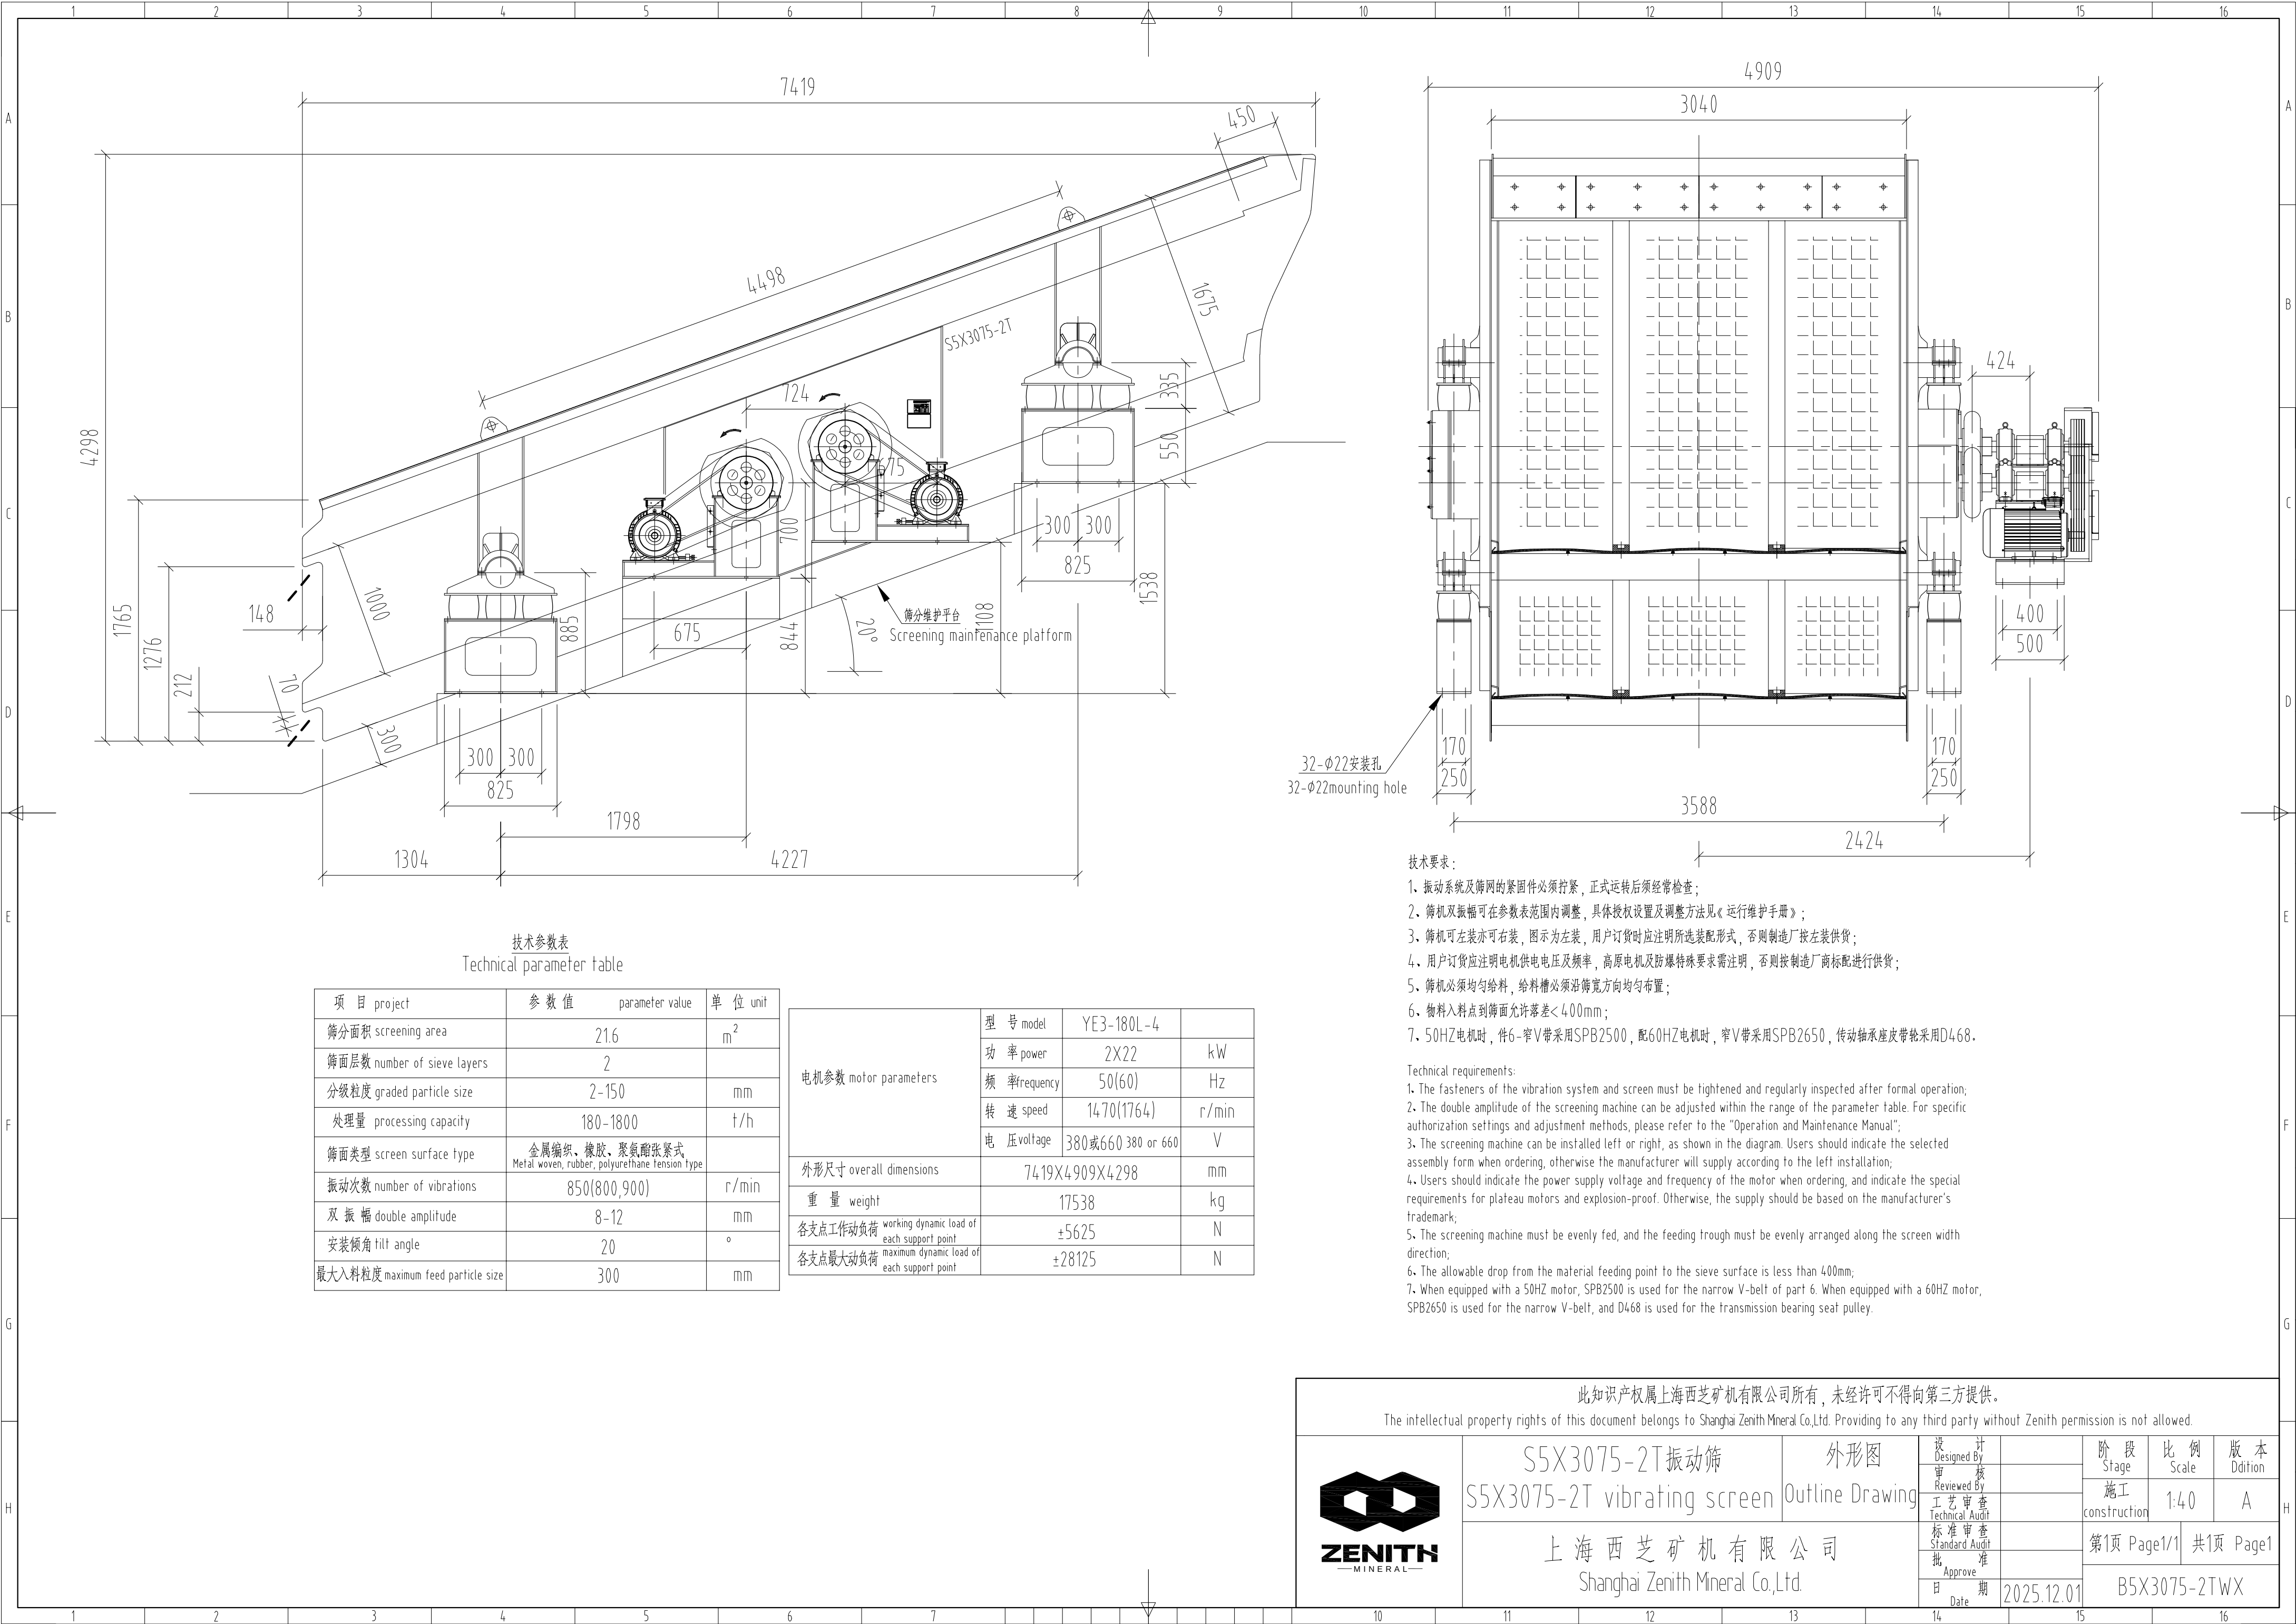

技术参数表
Technical parameter table

项 目 project	参 数 值 parameter value	单 位 unit
筛分面积 screening area	21.6	m ²
筛面层数 number of sieve layers	2	
分级粒度 graded particle size	2-150	mm
处理量 processing capacity	180-1800	t/h
筛面类型 screen surface type	金属编织、橡胶、聚氨酯张紧式 Metal woven, rubber, polyurethane tension type	
振动次数 number of vibrations	850(800,900)	r/min
双 振 幅 double amplitude	8-12	mm
安装倾角 tilt angle	20	°
最大入料粒度 maximum feed particle size	300	mm

电机参数 motor parameters	型 号 model	YE3-180L-4	
	功 率 power	2X22	kW
	频 率 frequency	50(60)	Hz
	转 速 speed	1470(1764)	r/min
	电 压 voltage	380或660 380 or 660	V
外形尺寸 overall dimensions	7419X4909X4298		mm
重 量 weight	17538		kg
各支点工作动负荷 working dynamic load of each support point	±5625		N
各支点最大动负荷 maximum dynamic load of each support point	±28125		N

- 技术要求：
- 1、振动系统及筛网的紧固件必须拧紧，正式运转后须经常检查；
 - 2、筛机及振幅可在参数表范围内调整，具体授权设置及调整方法见《运行维护手册》；
 - 3、筛机可左装亦可右装，图示为左装，用户订货时应注明所选装配形式，否则制造厂按左装供货；
 - 4、用户订货应注明电机供电电压及频率，高原电机及防爆特殊要求需注明，否则按制造厂商标配进行供货；
 - 5、筛机必须均匀给料，给料槽必须沿筛宽方向均匀布置；
 - 6、物料入料点到筛面允许落差<400mm；
 - 7、50HZ电机时，件6-窄V带采用SPB2500，配60HZ电机时，窄V带采用SPB2650，传动轴承座皮带轮采用D468。

- Technical requirements:
1. The fasteners of the vibration system and screen must be tightened and regularly inspected after formal operation;
 2. The double amplitude of the screening machine can be adjusted within the range of the parameter table. For specific authorization settings and adjustment methods, please refer to the "Operation and Maintenance Manual";
 3. The screening machine can be installed left or right, as shown in the diagram. Users should indicate the selected assembly form when ordering, otherwise the manufacturer will supply according to the left installation;
 4. Users should indicate the power supply voltage and frequency of the motor when ordering, and indicate the special requirements for plateau motors and explosion-proof. Otherwise, the supply should be based on the manufacturer's trademark;
 5. The screening machine must be evenly fed, and the feeding trough must be evenly arranged along the screen width direction;
 6. The allowable drop from the material feeding point to the sieve surface is less than 400mm;
 7. When equipped with a 50HZ motor, SPB2500 is used for the narrow V-belt of part 6. When equipped with a 60HZ motor, SPB2650 is used for the narrow V-belt, and D468 is used for the transmission bearing seat pulley.



ZENITH
— MINERAL —

S5X3075-2T振动筛

S5X3075-2T vibrating screen

外形图

Outline Drawing

上海西芝矿机有限公司

Shanghai Zenith Mineral Co.,Ltd.

设计
Designed By

审核
Reviewed By

工艺审查
Technical Audit

标准审查
Standard Audit

批准
Approve

日期
Date

2025.12.01

阶段
Stage

比例
Scale

版本
Ddition

施工
construction

1:40

A


第1页 Page1/1

共1页 Page1

B5X3075-2TWX

此知识产权属上海西芝矿机有限公司所有，未经许可不得向第三方提供。

The intellectual property rights of this document belongs to Shanghai Zenith Mineral Co.,Ltd. Providing to any third party without Zenith permission is not allowed.

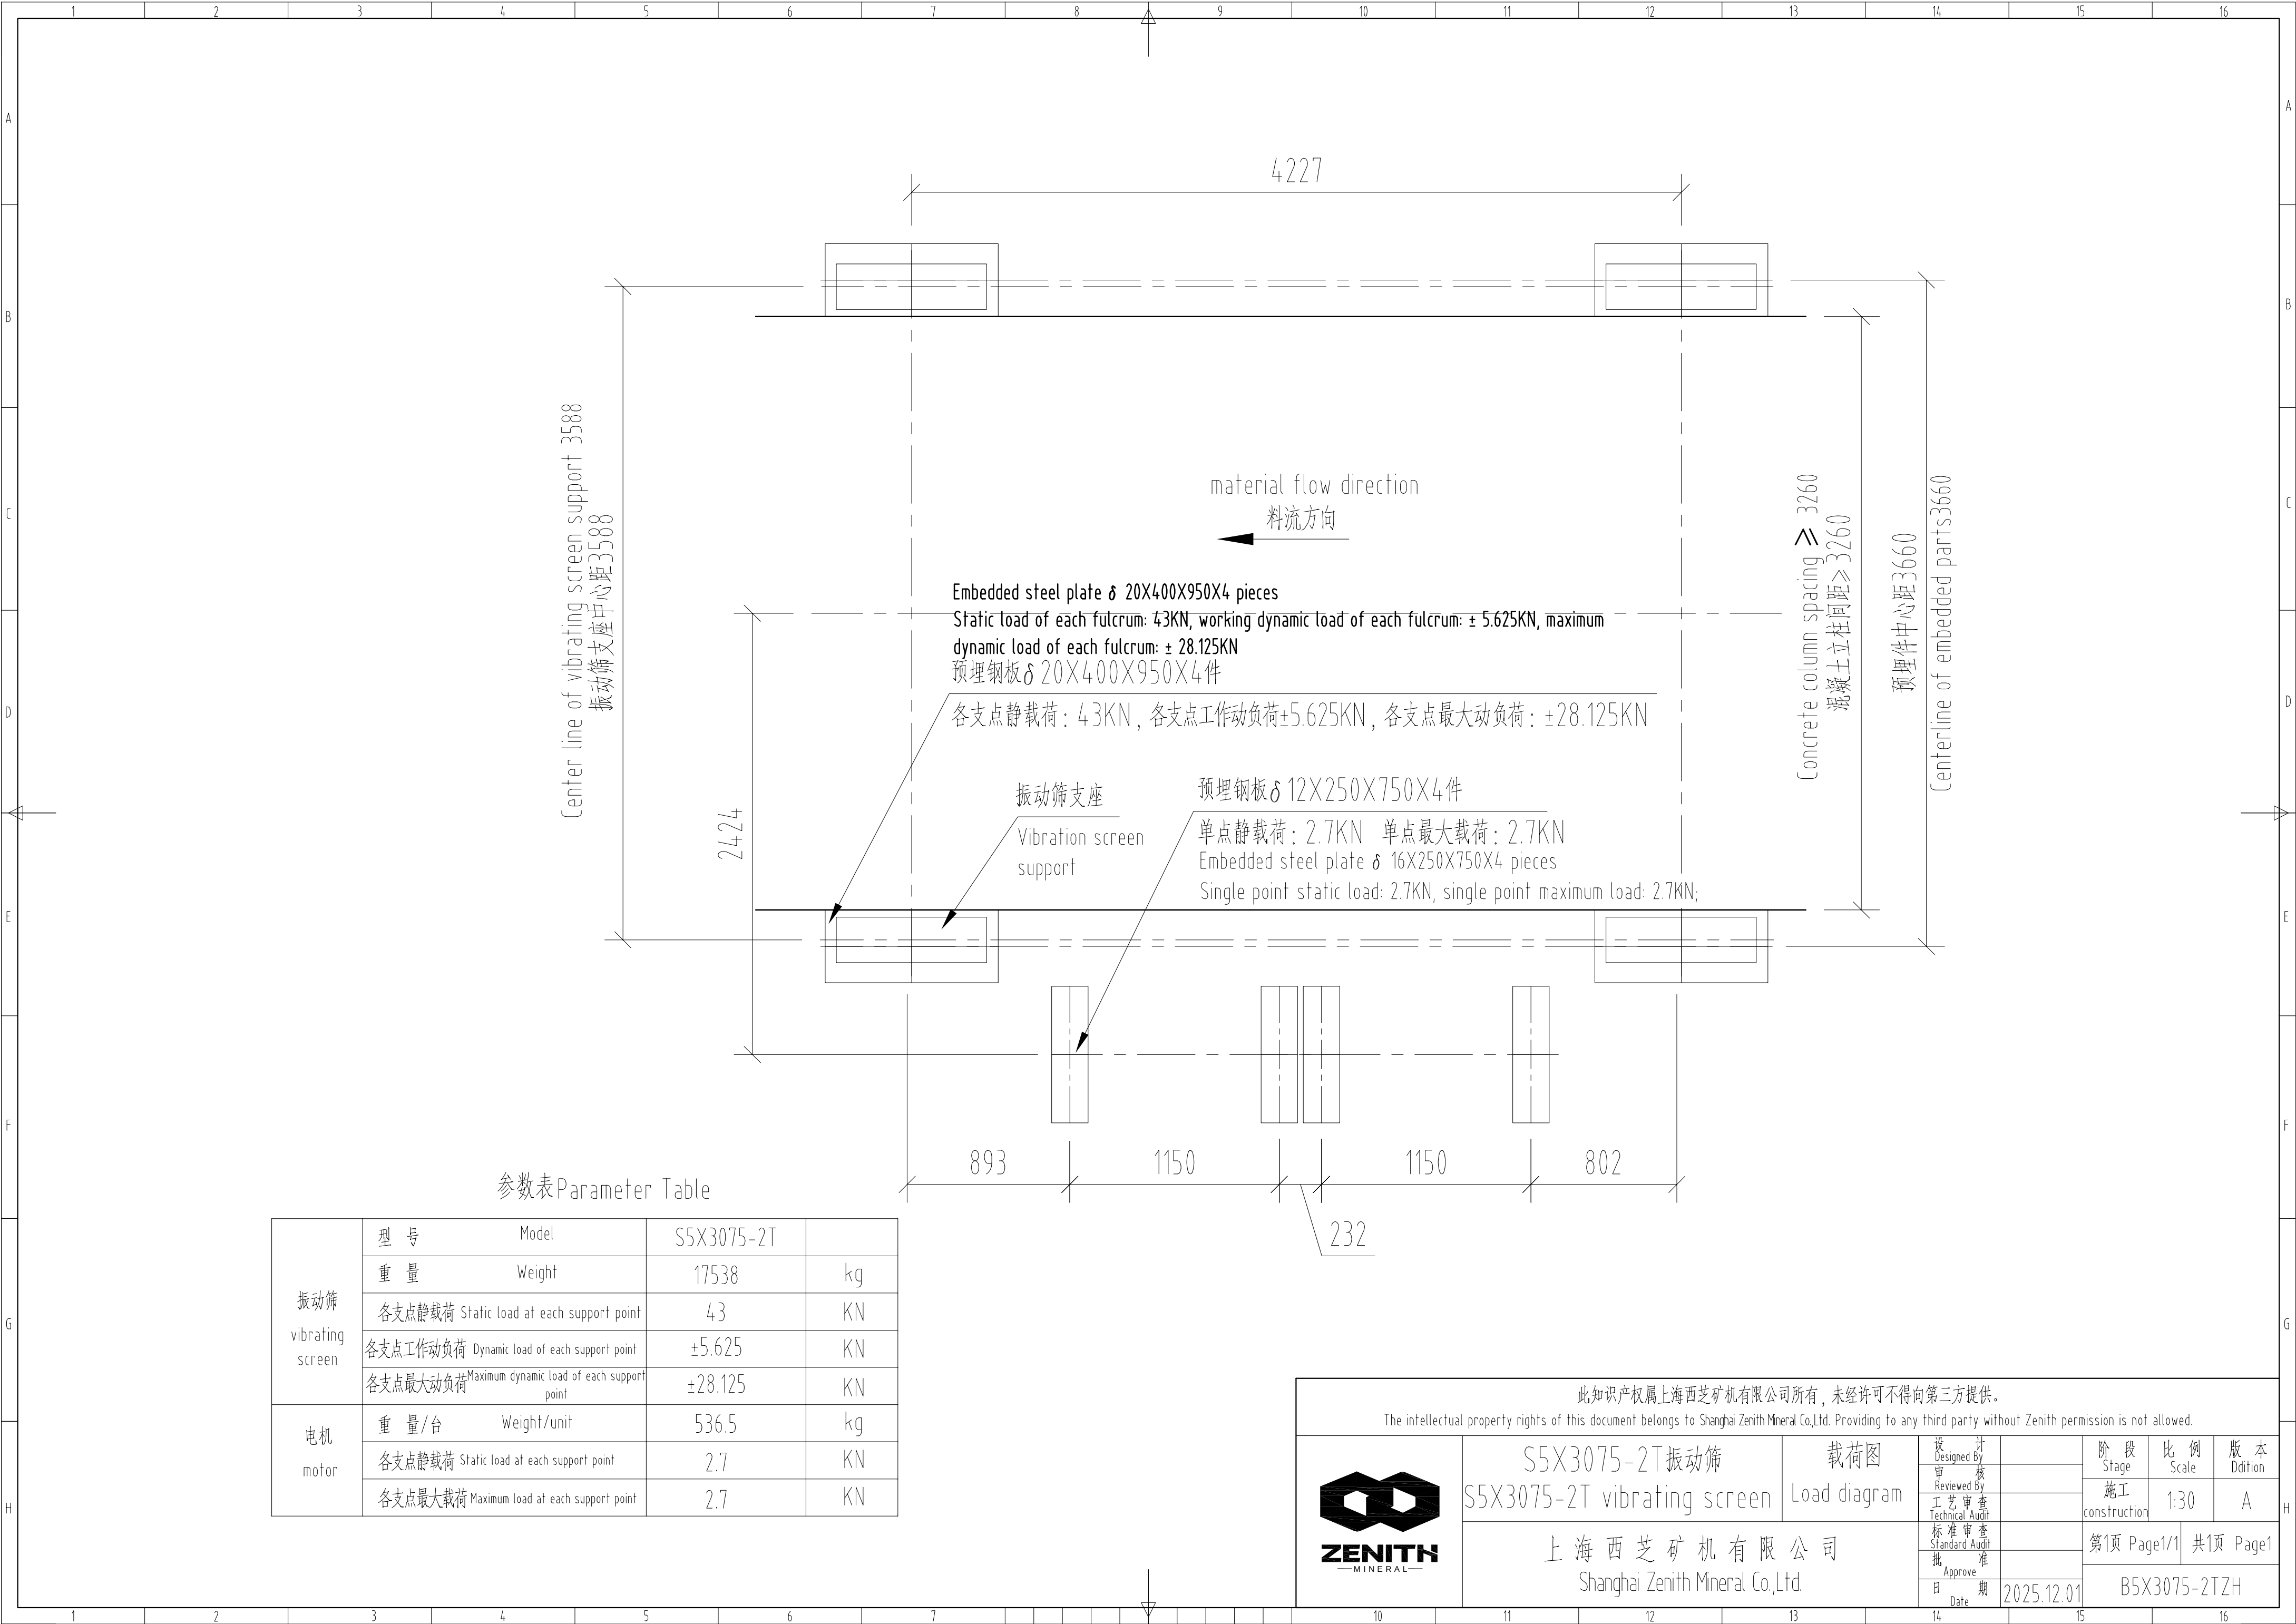

参数表Parameter Table

振动筛 vibrating screen	型 号	Model	S5X3075-2T	
	重 量	Weight	17538	kg
	各支点静载荷	Static load at each support point	43	KN
	各支点工作动负荷	Dynamic load of each support point	± 5.625	KN
	各支点最大动负荷	Maximum dynamic load of each support point	± 28.125	KN
电机 motor	重 量/台	Weight/unit	536.5	kg
	各支点静载荷	Static load at each support point	2.7	KN
	各支点最大载荷	Maximum load at each support point	2.7	KN

此知识产权属上海西芝矿机有限公司所有，未经许可不得向第三方提供。

The intellectual property rights of this document belongs to Shanghai Zenith Mineral Co.,Ltd. Providing to any third party without Zenith permission is not allowed.



ZENITH
MINERAL

S5X3075-2T振动筛

S5X3075-2T vibrating screen





上海西芝矿机有限公司

Shanghai Zenith Mineral Co.,Ltd.

载荷图

Load diagram

设计 Designed By		阶段 Stage	比例 Scale	版本 Edition
审核 Reviewed By		施工 construction	1:30	A
工艺审查 Technical Audit		第1页 Page1/1	共1页 Page1	
标准审查 Standard Audit		B5X3075-2TZH		
批准 Approve				
日期 Date	2025.12.01			

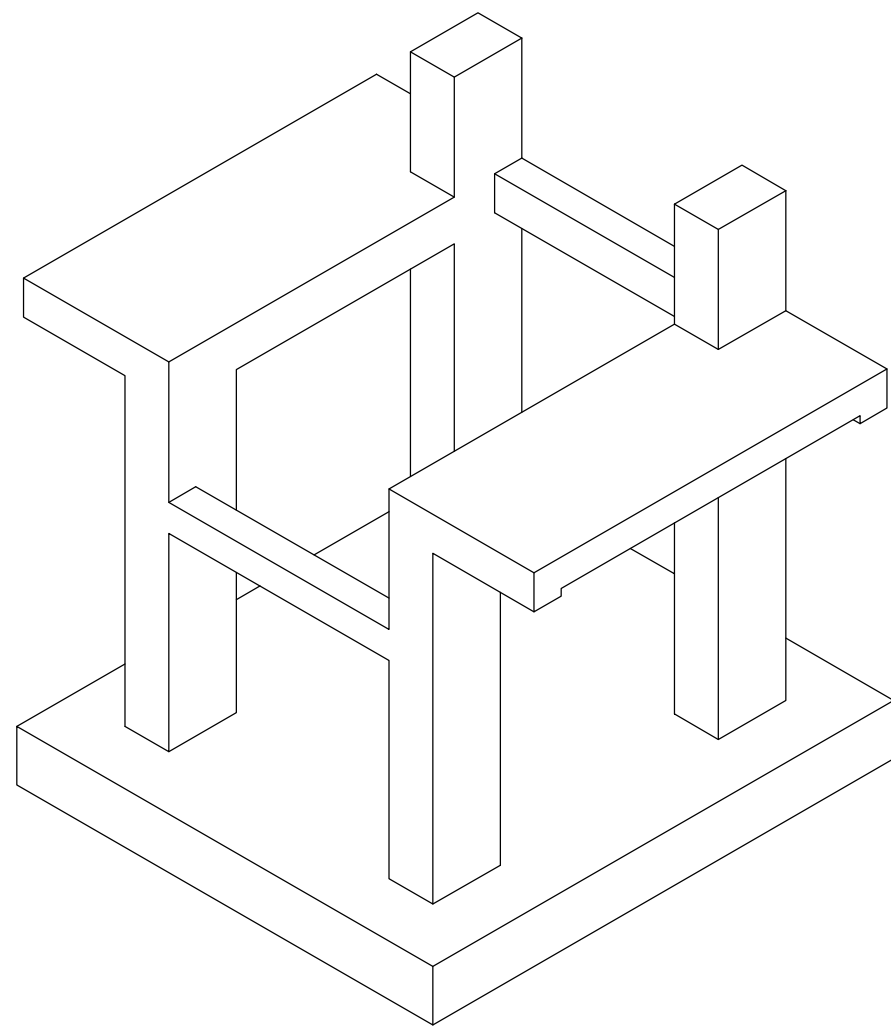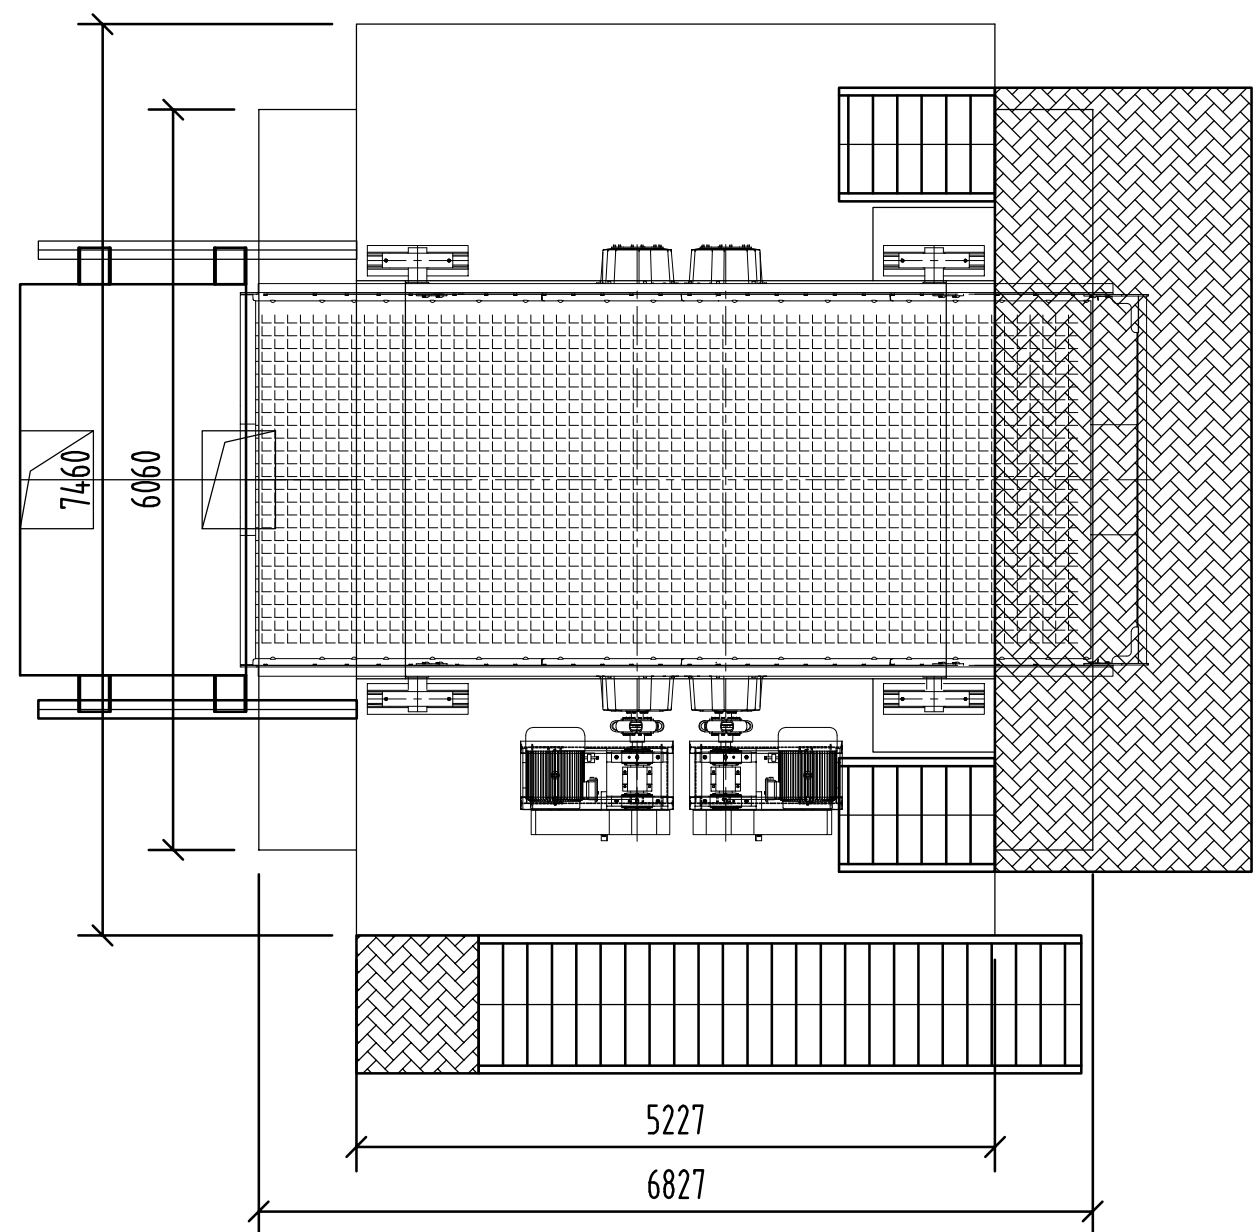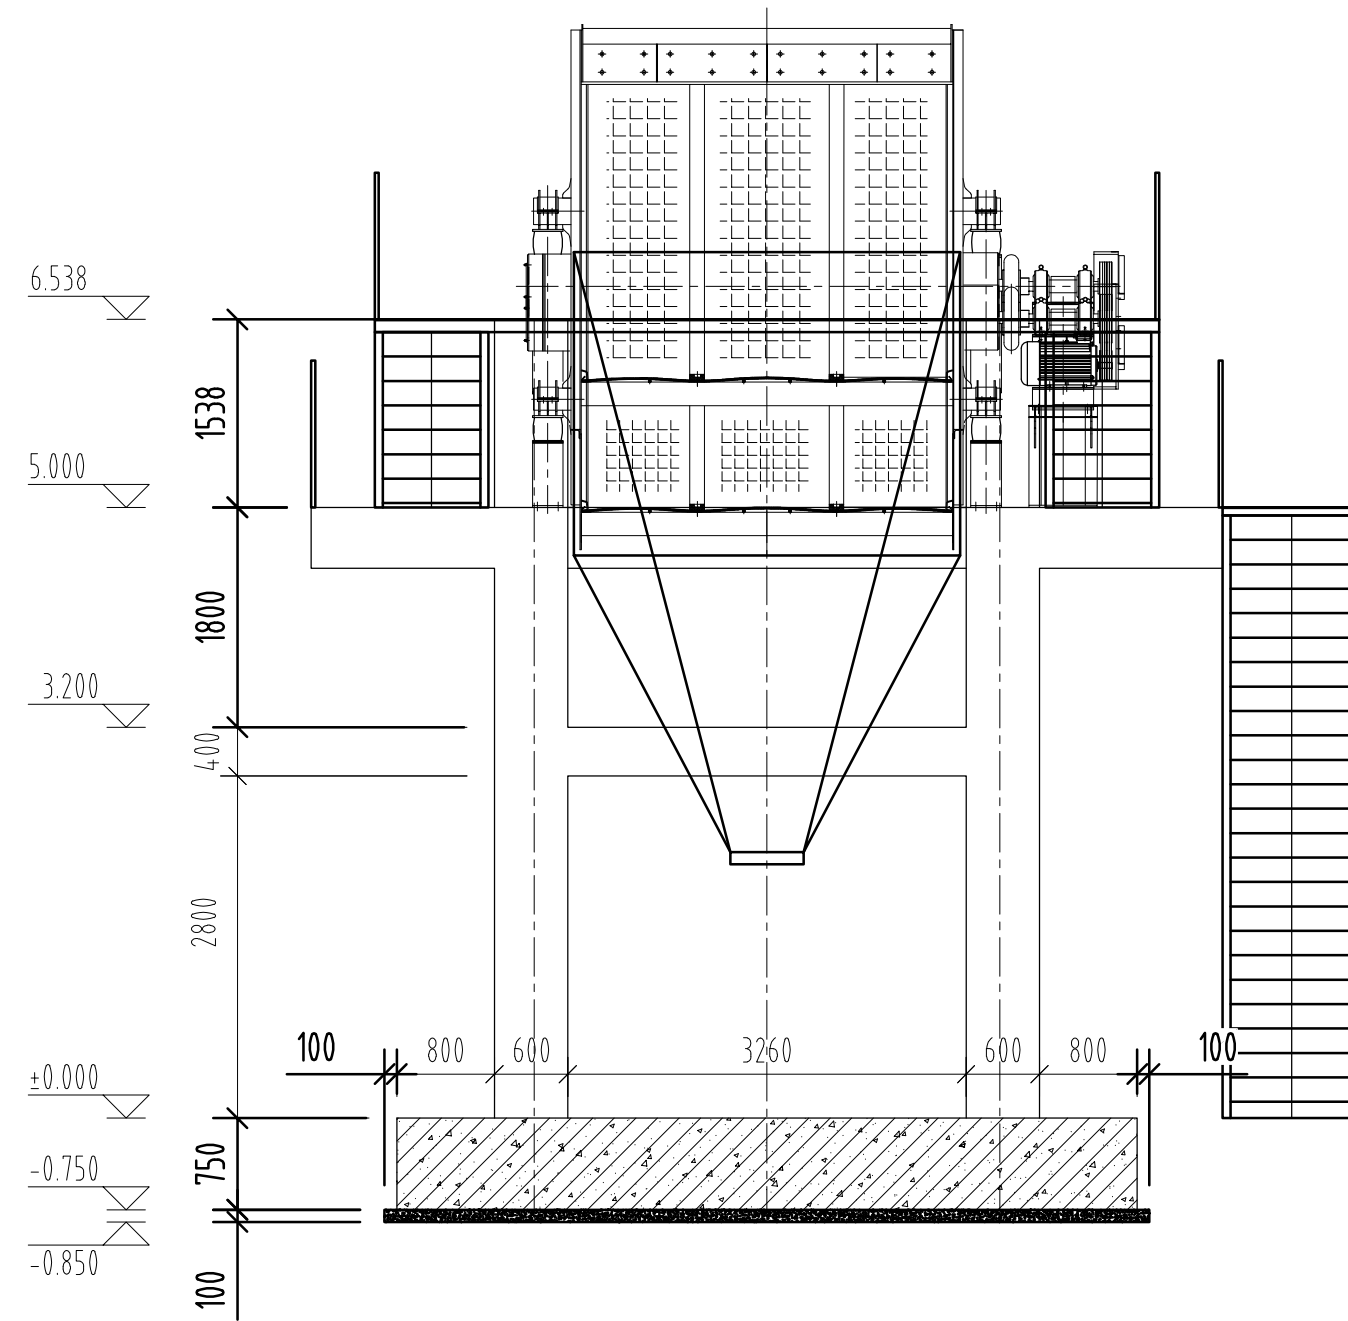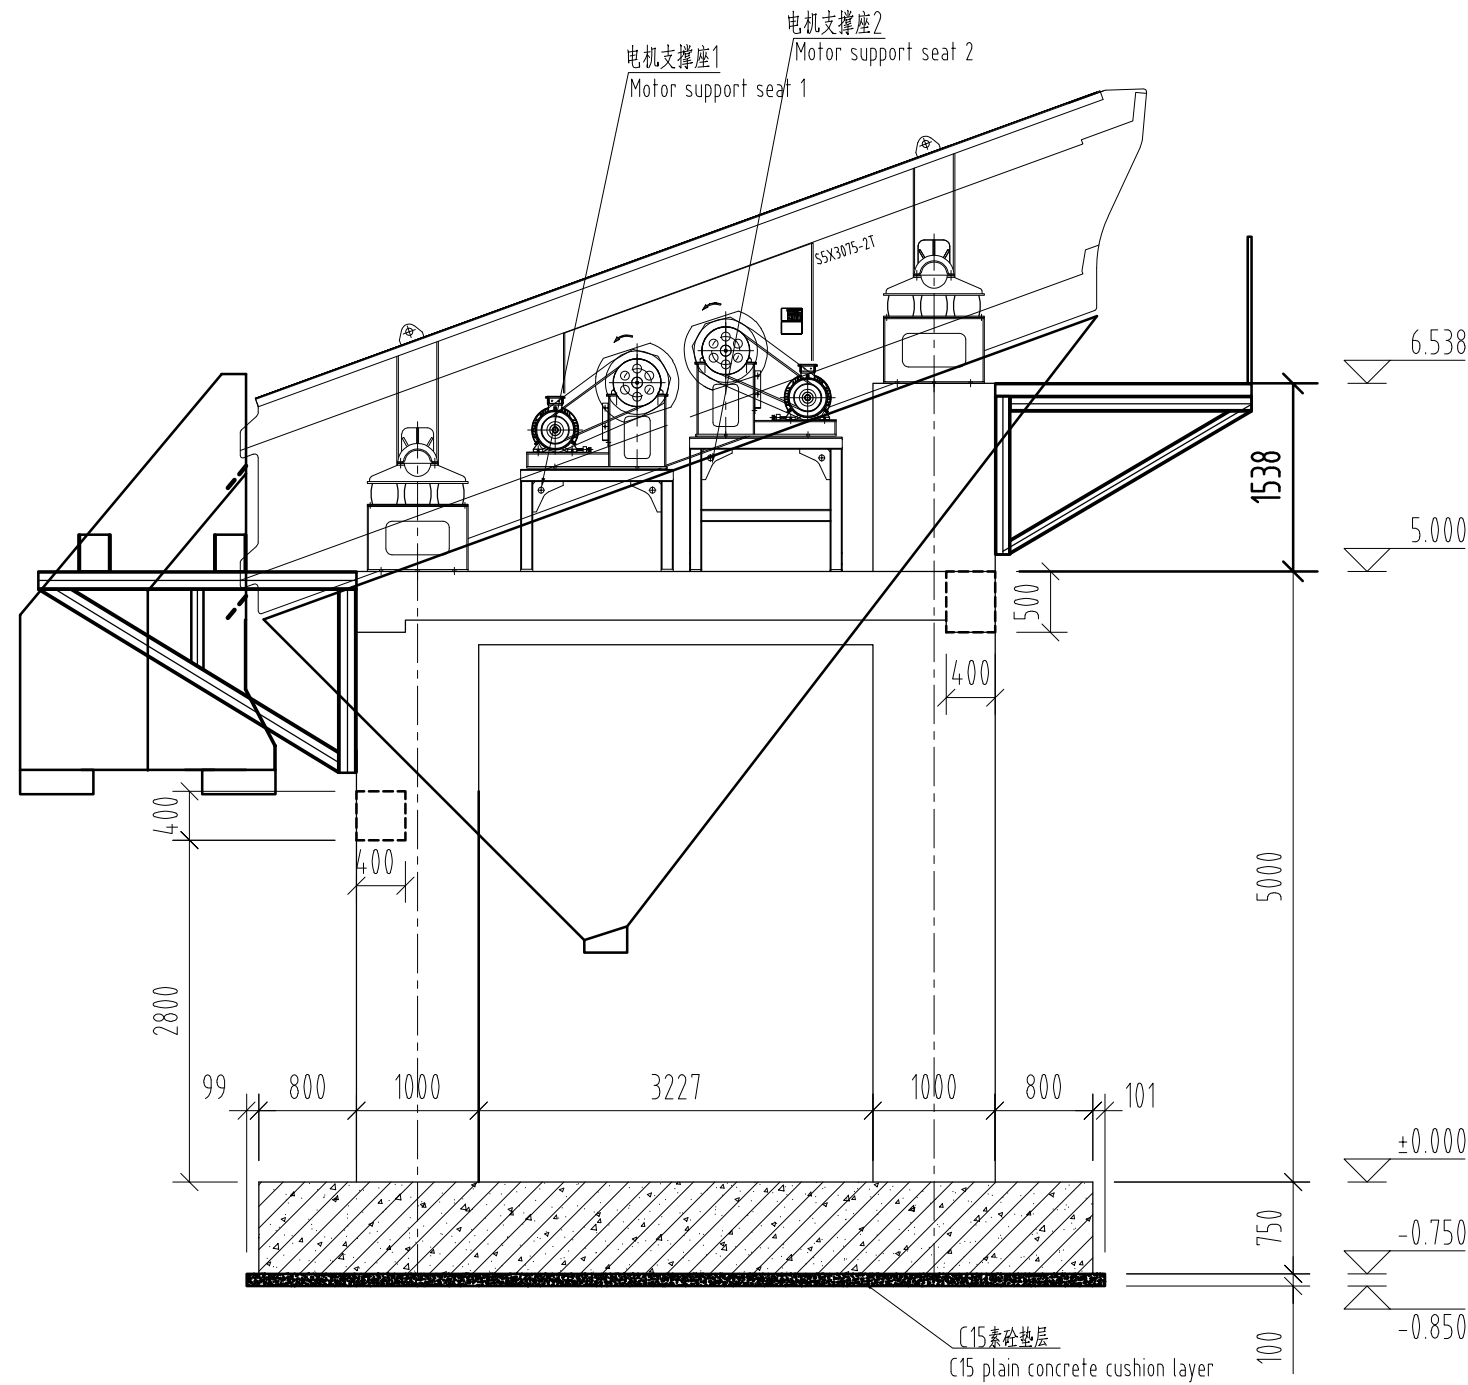


技术要求

- 地面以下部分根据当地地质情况可调整厚度,厂房和基础应根据基础图尺寸留有足够的高度和安装位置。
- 材料推荐:混凝土强度等级不得低于C30,实际施工以土建工程师设计为准。
- 此图纸仅作为工艺指导图纸,具体施工依据具有相关专业设计资质的设计院出具的图纸进行施工等相关作业。
- 在基础之下应做100mmC15垫层,垫层边界比基础多出100mm。


Technical Requirements

- The thickness of the underground part can be adjusted according to the local geological conditions, and the factory building and foundation should have sufficient height and installation position according to the dimensions of the foundation drawing.
- Material recommendation: The concrete strength grade shall not be lower than C30, and the actual construction shall be subject to the design of the civil engineer.
- This drawing is only used as a process guidance drawing, and the specific construction is based on the drawings issued by a design institute with relevant professional design qualifications for construction and other related operations.
- Under the foundation, a 100mm C15 cushion layer should be made, with the boundary of the cushion layer extending 100mm beyond the foundation.

此知识产权属上海西芝矿机有限公司所有, 未经许可不得向第三方提供。 The intellectual property rights of this document belongs to Shanghai Zenith Mineral Co.,Ltd. Providing to any third party without Zenith permission is not allowed.									
	S5X3075-2T 振动筛		子项工艺图 Sub item process diagram	设计 Designed by		阶段 Stage	比例 Scale	版本 Edition	
	S5X3075-2T vibrating screen			审核 Reviewed by		施工 construction	1:60	A	
				工艺审查 Technical Audit					
				标准审查 Standard Audit					
				批准 Approve					
	上海西芝矿机有限公司 Shanghai Zenith Mineral Co.,Ltd.			日期 Date	2025.12.01	第1页 Page1/1 共1页 Page1 B5X3075-2TZX			

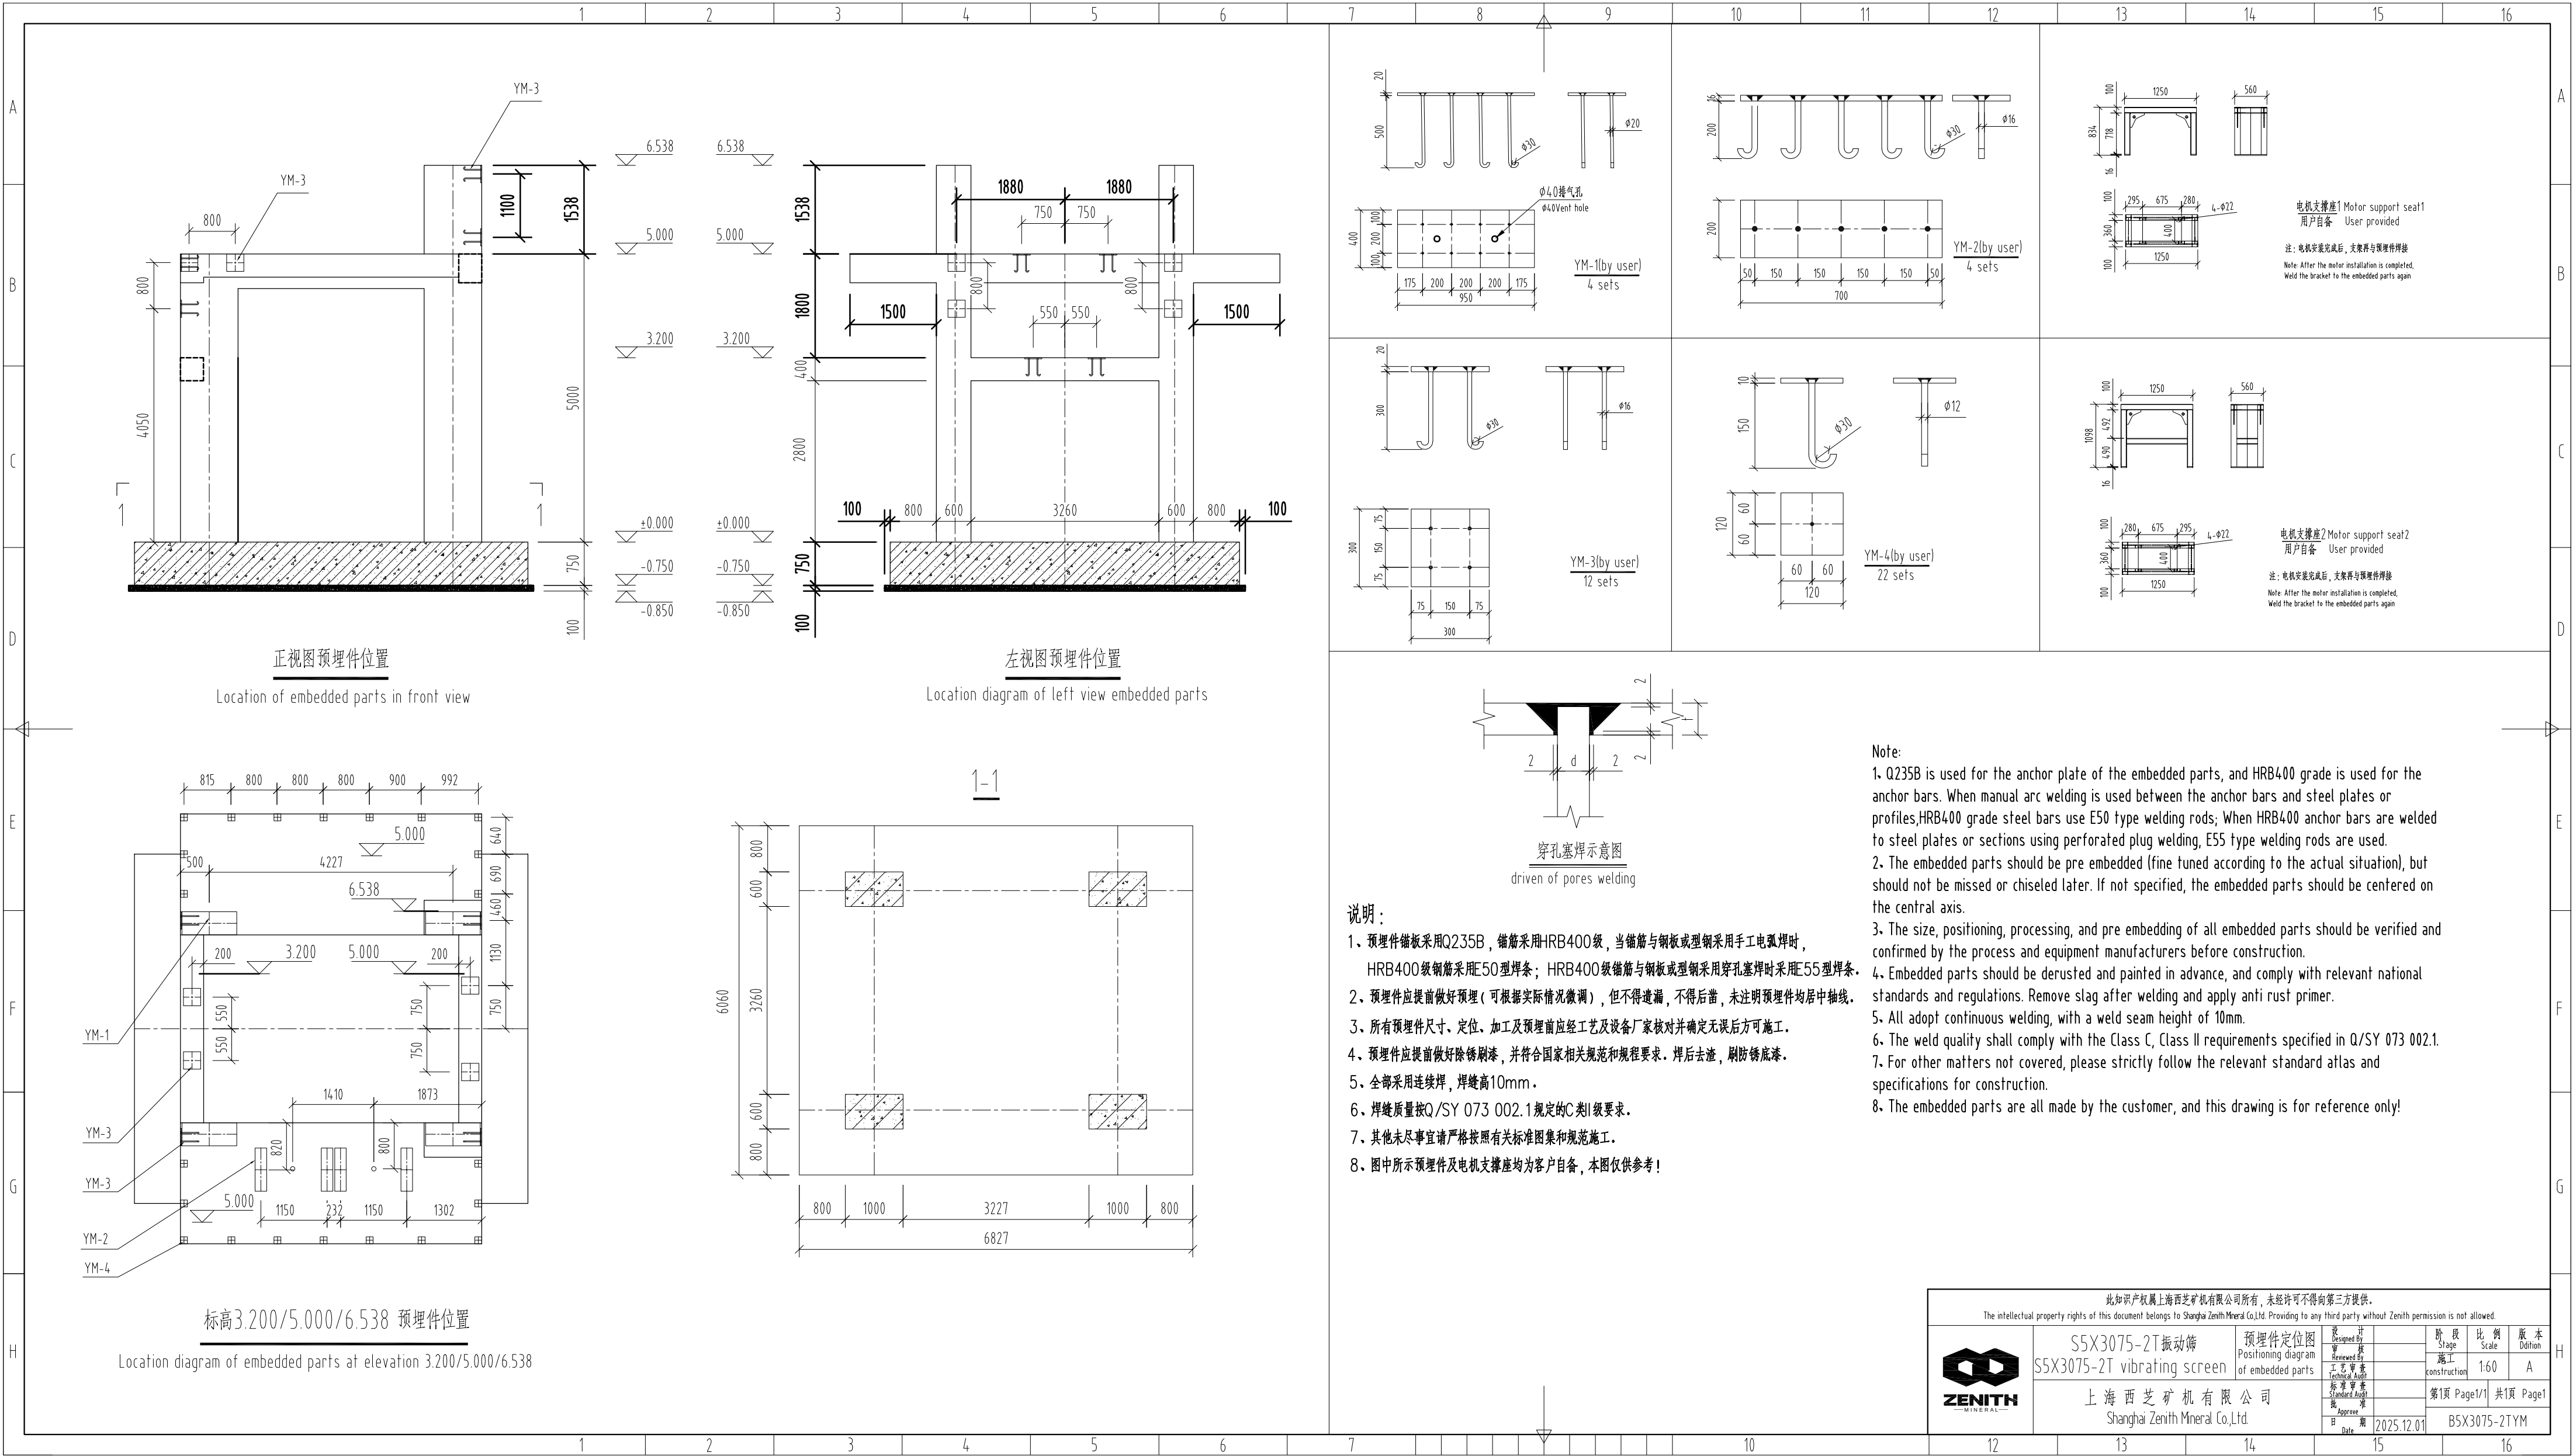


此知识产权属上海西芝矿机有限公司所有, 未经许可不得向第三方提供。 The intellectual property rights of this document belongs to Shanghai Zenith Mineral Co.,Ltd. Providing to any third party without Zenith permission is not allowed.										
	S5X3075-2T 振动筛 S5X3075-2T vibrating screen		预埋件定位图 Positioning diagram of embedded parts	设计 Designed By		阶段 Stage	比例 Scale	版本 Edition	第1页 Page1/1 共1页 Page1 BSX3075-2TYM	
				审核 Reviewed By		施工 construction	1:60	A		
				工艺审查 Technical Audit						
	上海西芝矿机有限公司 Shanghai Zenith Mineral Co.,Ltd			标准审查 Standard Audit		日期 Date	2025.12.01			
				批准 Approve						

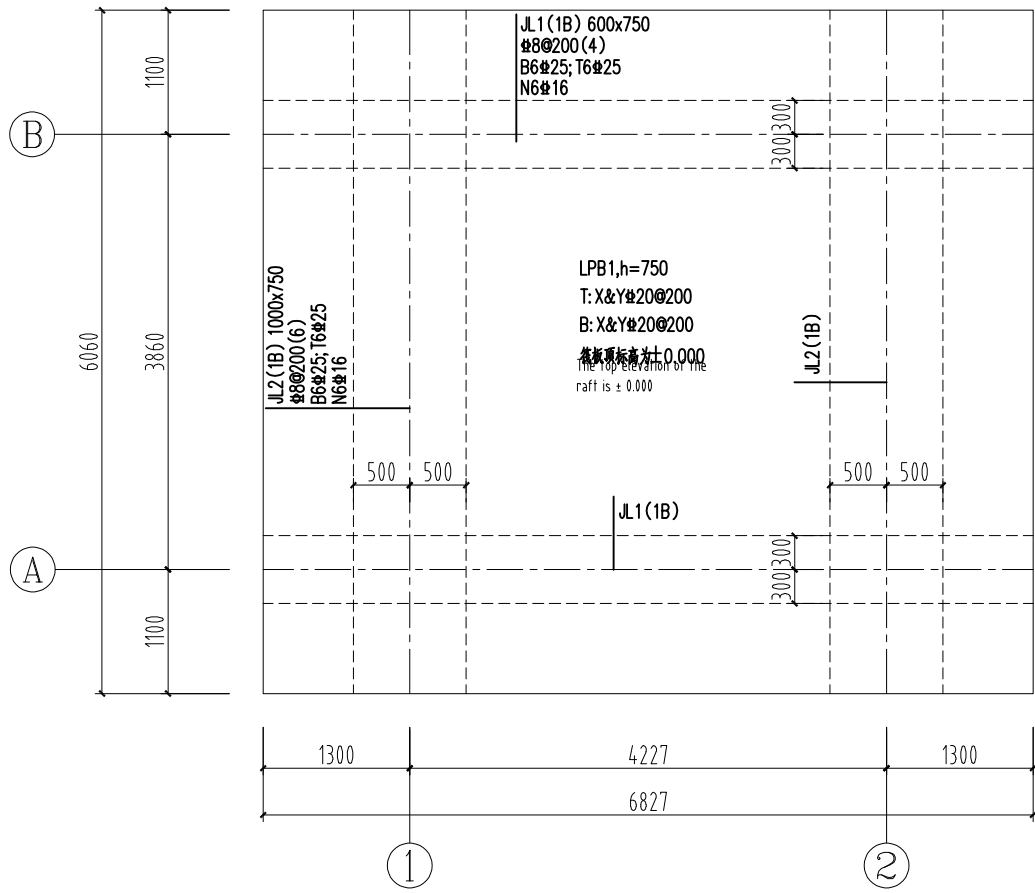


基础施工图

Foundation construction drawings

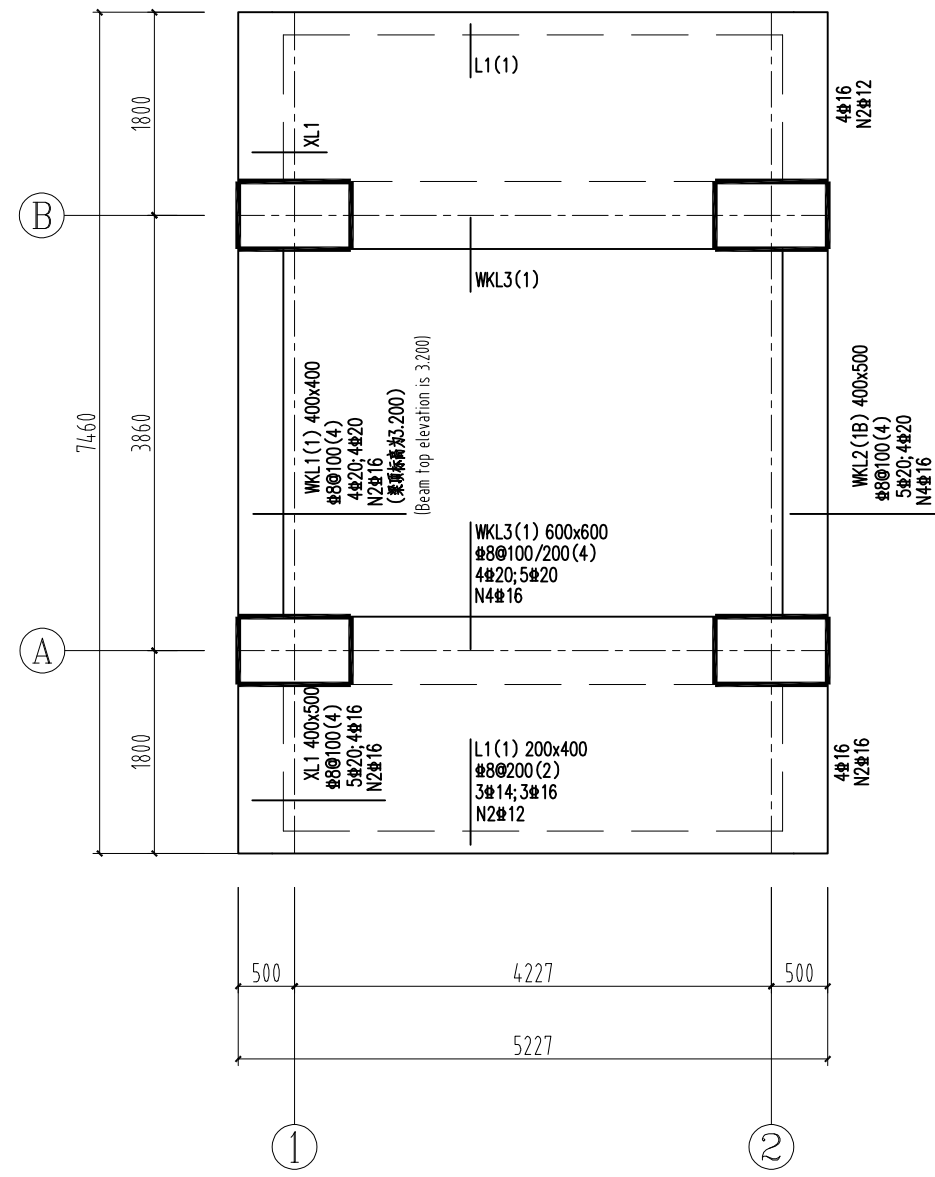


梁平法施工图

注：未单独注明结构标高均为5.000。
Construction Drawing of Beam Plane Method
Note: The top elevation of structures not separately indicated is 5.000.

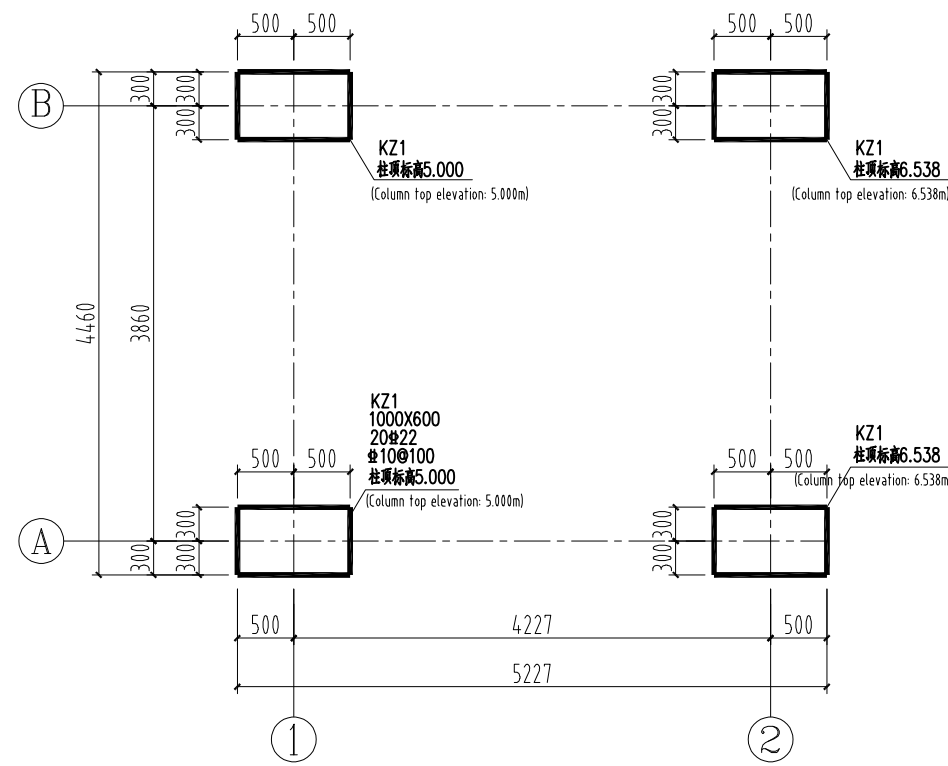


基础顶~6.538柱平法施工图

Construction Drawing of Foundation
Top~6.538 Column Flat Method

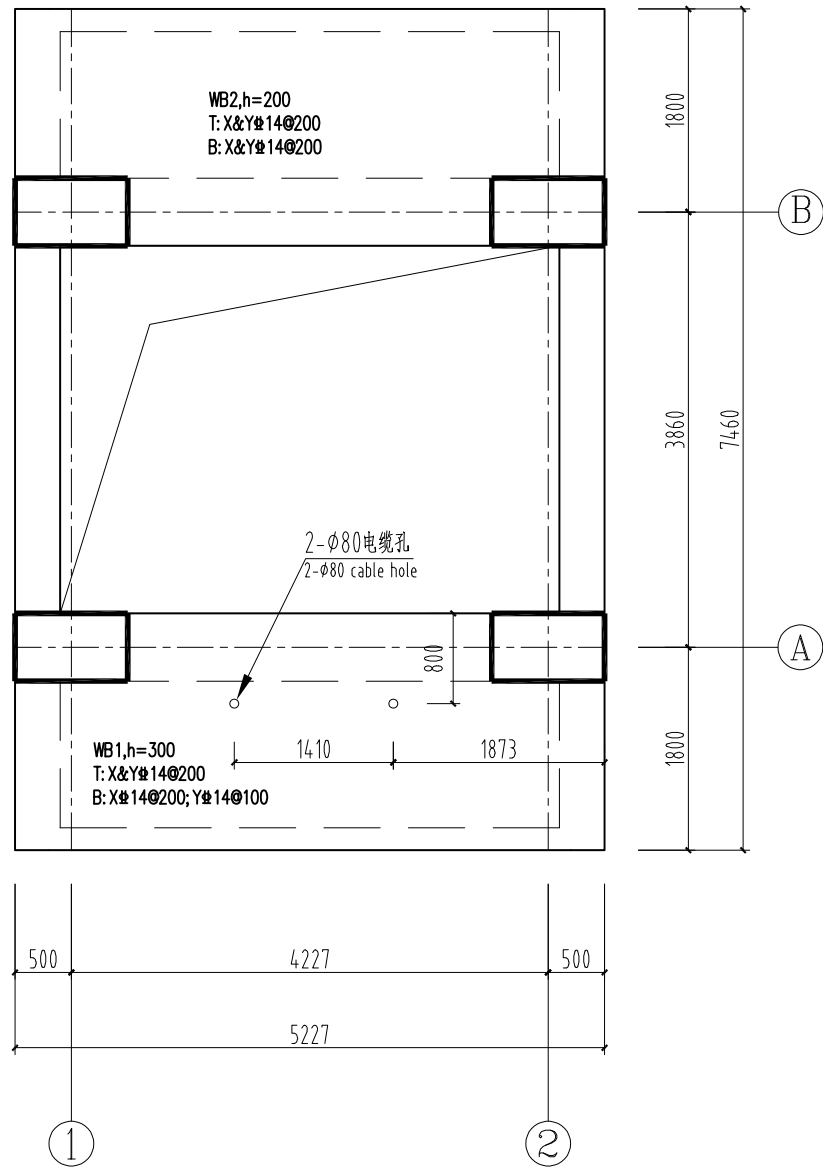

板平法施工图

注：未单独注明结构标高均为5.000。
Construction Drawing of Plate Leveling Method
Note: The top elevation of structures not separately indicated is 5.000.

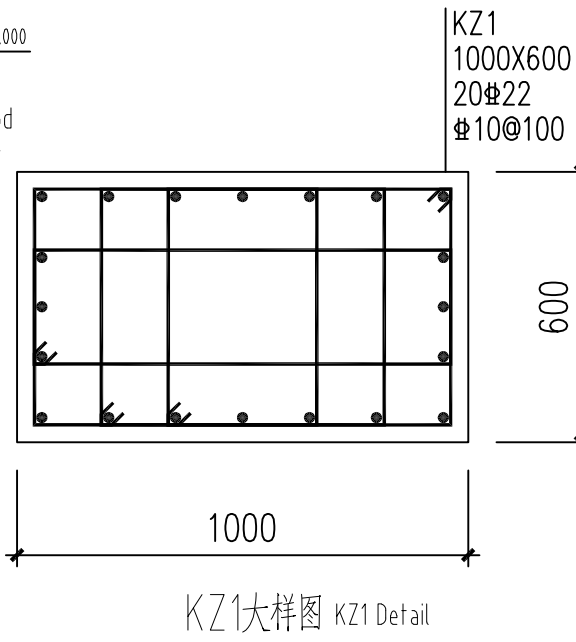

KZ1大样图 KZ1 Detail

说明:

- 本工程平面位置详工艺设计总图。
- 本工程无地勘报告，地基处理应根据地勘报告要求进行；基坑开挖应清除所有杂填土、回填土及其他不利土层，基坑底标高应根据现场实际情况与设计进行确定。
- 本工程地基基础设计等级为丙级，结构重要性安全系数为1.0。
- 图中标高以米(m)为单位，长度及尺寸以毫米(mm)为单位。
- 材料：除垫层外混凝土强度等级均为C30(商品混凝土)，钢筋HRB400(Φ)，混凝土抗渗等级为P6；基础底部设置100mm厚C20素混凝土垫层，垫层每边超出基础外边缘100mm。
- 保护层厚度：基础、基础梁40mm，梁、柱35mm，板25mm。
- 本工程采用天然地基，采用梁板式筏形基础，基底压力为120kPa，要求地基承载力不得小于基础压力设计值，否则应采取相应措施以提高地基承载力。
- 筏板马凳钢筋应与受力筋可靠连接，应保证上排钢筋的定位牢固，马凳筋的规格和间距由施工单位确定。
- 墙、柱竖向钢筋均伸入基础，插筋做法详国标图集《混凝土结构施工图平面整体表示方法制图规则和构造详图》(22G101-3)；
- 本工程基础施工完成后应及时进行回填，回填土施工应在上部结构施工前完成，基坑回填采用砂石垫层回填，回填前应清除基坑中的杂物，回填应在相对的两侧或四周同时均匀进行，并分层夯实每层虚铺厚度≤250mm，压实系数≥0.94。
- 混凝土结构施工前，应结合预留洞和预埋件图纸，确认预留洞和预埋件尺寸及位置无误后方可施工；在相关的主体结构混凝土浇筑前应进行预留洞口的预留和预埋件的预埋，预留洞不可打断钢筋。
- 本图应与国标图集《混凝土结构施工图平面整体表示方法制图规则和构造详图》(22G101系列)结合使用并执行其构造要求。本图中未尽事宜，均按现行的有关规范、规程及标准施工，确保工程质量。
- 本图仅用于工艺配合阶段，不作为施工依据；应根据有资质的审查机构审核后的设计图纸进行施工。

Explanation:

- The detailed plan position of this project can be found in the overall process design drawing.
- There is no geological survey report for this project, and the foundation treatment should be carried out according to the requirements of the geological survey report; Excavation of foundation pits should remove all miscellaneous fill soil, backfill soil, and other unfavorable soil layers. The bottom elevation of the foundation pit should be determined based on the actual site conditions and design.
- The foundation design level of this project is Class C, and the structural importance safety factor is 1.0.
- The elevation in the figure is measured in meters (m), and the length and dimensions are measured in millimeters (mm).
- Material: Except for the cushion layer, the concrete strength grade is C30 (commercial concrete), the steel reinforcement is HRB400 (Φ), and the concrete impermeability grade is P6; A 100mm thick C20 plain concrete cushion layer is set at the bottom of the foundation, with each side of the cushion layer extending 100mm beyond the outer edge of the foundation.
- Thickness of protective layer: 40mm for foundation and foundation beams, 35mm for beams and columns, and 25mm for slabs.
- The project adopts natural foundation, beam slab raft foundation, and the base pressure is 120kPa. It is required that the foundation bearing capacity should not be less than the design value of foundation pressure, otherwise corresponding measures should be taken to improve the foundation bearing capacity.
- The reinforcing bars of the raft saddle should be reliably connected to the load-bearing bars, and the positioning of the upper row of reinforcing bars should be ensured to be firm. The specifications and spacing of the saddle bars should be determined by the construction unit.
- The vertical steel bars of the walls and columns are all extended into the foundation, and the method of inserting steel bars is detailed in the national standard atlas "Drawing Rules and Construction Details of Concrete Structure Construction Plan Overall Representation Method" (22G101-3);
- After the completion of the foundation construction of this project, backfilling should be carried out in a timely manner. Backfilling construction should be completed before the construction of the upper structure. The foundation pit should be backfilled with a sand and gravel cushion layer. Before backfilling, the debris in the foundation pit should be removed. Backfilling should be carried out evenly on the opposite sides or sides, and each layer should be compacted layer by layer with a virtual paving thickness of ≤ 250mm and a compaction coefficient of ≥ 0.94.
- Before the construction of concrete structures, the dimensions and positions of the reserved holes and embedded parts should be confirmed to be correct based on the drawings of the reserved holes and embedded parts before construction can proceed; Prior to pouring concrete into the relevant main structure, reserved openings and embedded parts should be made, and the reserved openings must not break the steel bars.
- This drawing should be used in conjunction with the national standard atlas "Drawing Rules and Construction Details for Concrete Structure Construction Drawing Plane Integral Representation Method" (22G101 series) and comply with its construction requirements. Any matters not covered in this drawing shall be constructed in accordance with current relevant specifications, regulations, and standards to ensure the quality of the project.
- This diagram is only for the process coordination stage and is not used as a construction basis; Construction should be carried out based on the design drawings reviewed by qualified review agencies.

此知识产权属上海西芝矿机有限公司所有，未经许可不得向第三方提供。 The intellectual property rights of this document belongs to Shanghai Zenith Mineral Co.,Ltd. Providing to any third party without Zenith permission is not allowed.										
	S5X3075-2T振动筛 S5X3075-2T vibrating screen		结构施工图 Structural construction drawings	设计 Designed By		阶段 Stage	比例 Scale	版本 Edition		
				审核 Reviewed By		施工 construction	1:65	A		
				工艺审查 Technical Audit						
	上海西芝矿机有限公司 Shanghai Zenith Mineral Co.,Ltd.			标准审查 Standard Audit						
				批准 Approve				第1页 Page1/1	共1页 Page1	
				日期 Date				2025.12.01	B5X3075-2TGS	